


INSTRUCTIONS FOR PRIME PRODUCTS RATCHET STYLE CLIP ON TOW MIRRORS

Instructions apply to 30-0083 (shown) and 30-0086 XLR Mirrors


1 CONTENTS

- A. XLR Mirror (1 ea)
- B. Ratchet Assembly (1 set of 2)
- C. Strap Bridge (1 ea)

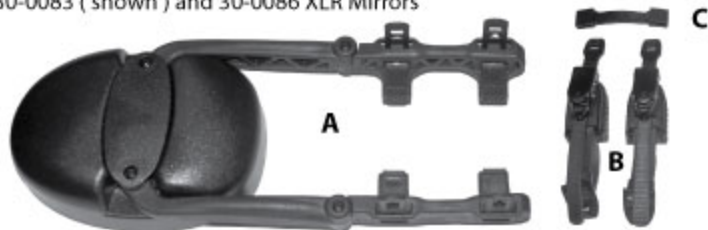

2 PREPARATION

- D. Extend arms 1" wider than vehicle mirror.
- E. 4 ARM CLAMPS should be in open position.
- F. Install Strap Bridge. Remove both ratchet straps from ratchets by opening ratchet cover and depressing button release.
- G. Insert STRAP BRIDGE and reinstall Ratchet Straps into the ratchets.
- H. Rubber strap on ratchet adjuster can be lengthed by sliding connector clip lower on strap. Make certain at least 2" of rubber extend beyond clip so strap does not pull through.

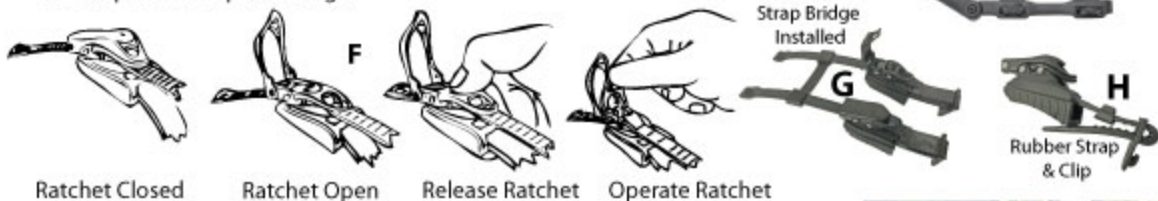

3 INSTALLATION ON VEHICLE

- I. Install Ratchet Assemblies into Mirror Arms by hooking them onto the the quick connect attachments on both mirror arms.
- J. Slide XLR Mirror on to vehicle mirror. Make sure that the arm clamps are adjusted so they will pinch frame of vehicle mirror when ratchets are tightened.
- K. Tighten straps by opening opening cover on ratchet and ratcheting up and down until straps are snug.

Note: Ratchet Straps should be installed as illustrated. They may be removed and rotated 180 degrees for use on opposite side of vehicle.

The XLR is designed to fit passenger and drivers side mirrors. Ratchet Straps should be installed as illustrated. They may be removed and rotated 180 degrees for use on opposite side of vehicle.

Check frequently that mirror is securely attached. Because of universal fit design of this mirror the consumer must determine suitability of this mirror to their particular vehicle. Do not use this mirror if you cannot securley attach it to your tow vehicle. While this mirror will fit most vehicles it will not fit all.



www.primeproducts.com

30-0083 XLR Dual Head

30-0086 XLR 2.5

Please call 800-327-7463 or 562-531-1395 for questions regarding installation.